



UNICLASS L6412:P21	CAW M10
CI/SfB	(43) Yq2

Technical data sheet

May 2024

ScreedPro Feather Finish

A premium multi-purpose, flexible, fast setting, quick drying smoothing and patching compound. Suitable for commercial and domestic applications.



Features

- 0 – 6mm depth
- Scratch Coat
- Rapid drying
- Fast setting
- Protein free
- True feather edge
- Floorcoverings from 15 mins
- 10kg



15 min
foot traffic



floors



internal



flexible



under-floor
heating



working time
10-15 mins



lifetime
guarantee

The compound shall be ScreedPro Feather Finish as manufactured by N&C Building Products Limited, 41-51 Freshwater Road, Chadwell Heath, Romford, Essex, RM8 1SP, England. Tel: 020 8586 4600 and shall be applied strictly in accordance with the manufacturer's current data sheets and instructions.





British Standard - Guidelines

All aspects of the installation must be in accordance with the requirements of BS 8204, BS 8203 (Installation of Resilient Floorcoverings) or BS 5325 (Installation of Textile floorcoverings). Complies with EN standards and supplementary specifications.

Description

ScreedPro Feather Finish has been specially designed to dry rapidly and provide a high bond to concrete, plywood, cement/sand screeds, existing sub-floors and smoothing compounds.

Can be used in commercial and domestic locations where the installation involves the use of resilient sheet or floorcoverings such as vinyl sheet or tiles, carpet etc.

Use Screedpro Feather Finish for patching, filling and feather finishing day work joints, ridges, gouges, depressions, uneven trowel marks, within the sub-floor, as well as smoothing joints between staggered plywood sheets and for levelling grout joints.

It is also suitable for use on stairs, steps and general repairs to cracks and holes. It is an internal product that is protein-free which allows it to be used in biologically sensitive areas. It is ideal for use in hospitals, food preparation areas, food shops, restaurants, schools, care homes etc.

Substrates

ScreedPro Feather Finish is suitable due to its special formulation for use on all common sub-floors such as concrete, sand/cement screeds, flooring grade asphalt, quarry tiles, porcelain tiles, ceramic tiles, terrazzo, internal steel decks, flooring grade plywood, cement faced backer boards.

How much material?

Applied Thickness	Approximate Coverage Per 10kg Unit	Consumption Per 100m ² Area
Scratch	50m ²	2 bags
1mm	10m ²	10 bags

The table should be used for guidance purposes only and all information given can be affected by the substrate texture and absorbency. The coverage given is based on a smooth non-absorbent subfloor.

Preparation

The surface of the sub-floor must be clean, sound and free from dust, plaster droppings, grease, paint, polish and any water softener or loosely adhered materials.

Where rising damp is present it is recommended that a Surface Damp Proof Membrane is incorporated into the sub-floor construction.

In domestic applications only, ScreedPro Feather Finish may be installed over existing adhesive residues which are thin, sound and well bonded. The residues must not be affected by either the initial wetting from the applied mortar or the adhesive used to install the new floorcovering. ScreedPro Feather Finish is not recommended over adhesive residues in commercial situations.

Prior to levelling wooden floors, re-nail and firmly fix all loose boards. Timber floors should be sufficiently rigid by screwing or ring nail fixing 6mm to 12mm thick plywood sheets to provide a sound and stable base for the new flooring. In all cases sub-floor ventilation must be adequate to prevent deterioration and moisture movement.

Mixing

ScreedPro Feather Finish is mixed with clean water 3 parts by volume of powder to 1 part by volume of water (2.5kg powder to 0.8 Litres of water) to achieve an easily trowelled, thixotropic consistency. Always add powder to water and mechanically mix in a rigid sided bucket.

Application

ScreedPro Feather Finish is easily applied using a steel trowel. Spread the material out evenly over the prepared area to provide a smooth uniformed surface free from imperfections, ensuring that all defects and indentations are fully filled in.

Depending on the porosity of the substrate it is advisable to pre-dampen prior to application of ScreedPro Feather Finish.

Note: When applying ScreedPro Feather Finish to wooden floors the maximum total depth is 3mm.



Technical Information

Specification	ScreedPro Feather Finish
Application Thickness	Up to 6mm
Working Life @ 20° C	10 minutes
Walk on time @ 20° C	15 minutes
At 1mm thickness ready for Ceramic Tiles/Loose Lay LVT	15 minutes
Resilient floor coverings	Approx 30 minutes bonded
Application over non-absorbent surfaces	Allow 1 hour in good drying conditions
Installation Temperature	Minimum 5°C
Packaging	10kg

Tools

Suitable steel smoothing trowel, mixing bucket, electric drill and powder whisk.

Cleaning

Wash tools thoroughly with water immediately after use.

Shelf Life

Minimum of 12 months in unopened bags from the date of packing.

Storage


This product must be stored clear of the ground, under dry conditions, out of direct sunlight. Protect from frost. If allowed to freeze N&C Building Products cannot guarantee the performance of the product.

Health & Safety Advice

ScreedPro Feather Finish is classified under the Chemicals (Hazard Information and Packaging for Supply) Regulations.

The relevant Material Safety Data Sheet can be obtained from the website or directly from N&C Building Products Ltd at the address below.

N & C Building Products Limited
41-51 Freshwater Road
Chadwell Heath
Romford
Essex RM8 1SP
Tel: 020 8586 4600
Fax: 020 8586 4646
Email: info@nichollsandclarke.com
Web: www.ncnicobond.com

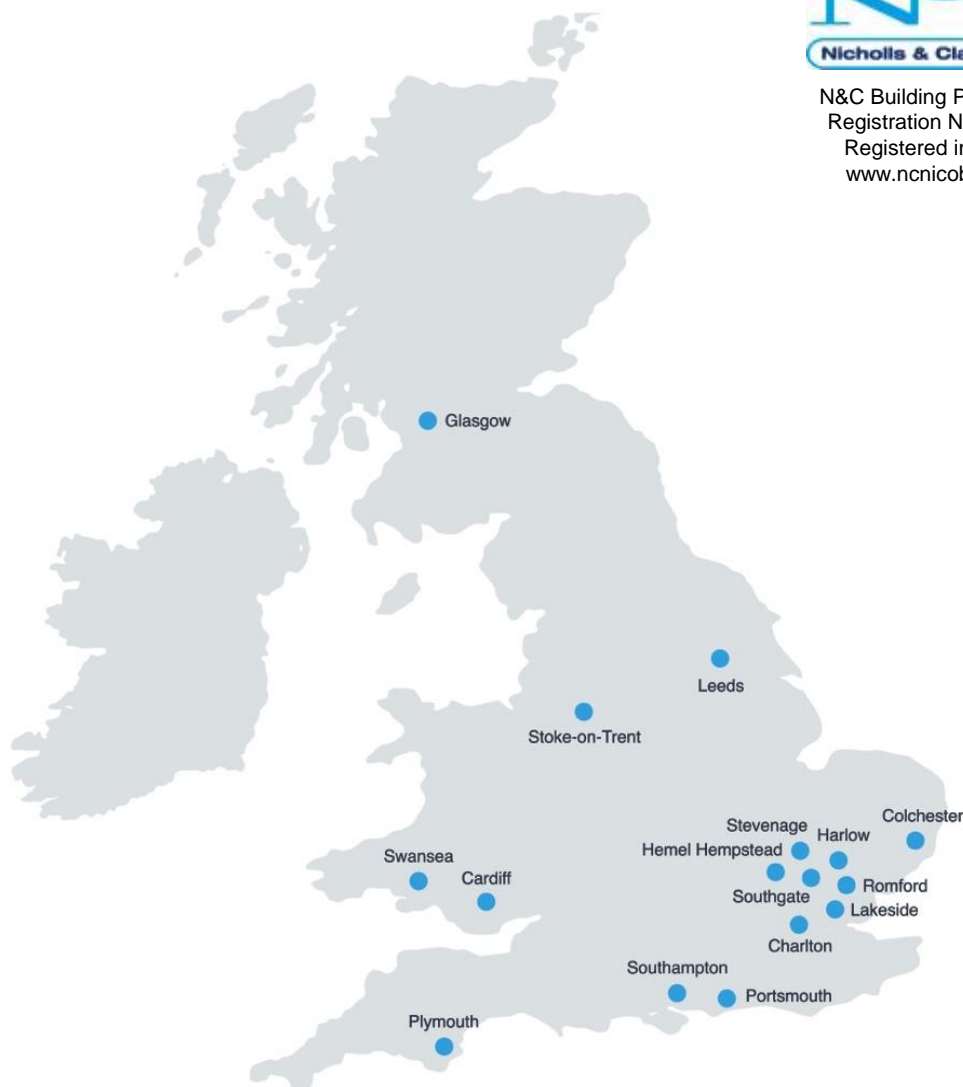

Distribution Centres, Trade Counters & Showrooms

N&C Building Materials
 41 - 51 Freshwater Road
 Chadwell Heath,
 Romford Essex RM8 1SP
 Tel: 020 8586 4600
 Fax: 020 8586 4646

C1 Cothill Trading Estate
 Plympton
 Plymouth PL7 1SR
 Tel: 01752 339724
 Fax: 01752 342746

B1 - B3 Sneyd Trading Estate
 Sneyd Hill, Burslem
 Stoke on Trent ST6 2PA
 Tel: 01782 575727
 Fax: 01782 575641

26 Colquhoun Avenue
 Hillington
 Glasgow G52 4BN
 Tel: 0141 880 1200
 Fax: 0141 880 1212

4 Waterloo Industrial Estate
 Flanders Road
 Hedge End
 Southampton SO30 2QT
 Tel: 01489 779700
 Fax: 01489 779701

3 - 4 Cardiff Trade Park
 Hadfield Road
 Cardiff CF11 8AQ
 Tel: 02920 390146
 Fax: 02920 224356

2 City Park Industrial Estate
 Gelderd Road
 Leeds LS12 6DR
 Tel: 0113 224 4630
 Fax: 0113 224 4631

Trade Counters & Showrooms

1A - 1B Alexander Place
 Lower Park Road
 New Southgate
 London N11 1QD
 Tel: 020 8361 6050
 Fax: 020 8361 4757

14 Meridian Trading Estate
 Bugsby Way, Charlton
 London SE7 7SJ
 Tel: 020 8269 5960
 Fax: 020 8269 5961

Units 10 - 11, 14 - 15
 Advent Way, Edmonton
 London N18 3AF
 Tel: 020 8586 4600
 Fax: 020 8586 4646

8 Ascent Park
 Edinburgh Way,
 Harlow Essex CM20 2HW
 Tel: 01279 621980
 Fax: 01279 621981

1 Cliffside Trade Park
 Motherwell Way,
 Lakeside, West Thurrock
 Essex RM20 3XD
 Tel: 01708 680180
 Fax: 01708 680181

2 - 5 Albarn Close
 Wyncolls Road
 Severalls Park, Colchester
 Essex CO4 9HY
 Tel: 01206 844 161
 Fax: 01206 845 878

9 - 11 McDonalds
 Business Park, Maylands
 Hemel Hempstead
 Hertfordshire HP2 7EB
 Tel: 0845 2606 025
 Fax: 0845 2606 026

16 Arlington Business Park
 Whittle Way, Stevenage
 Hertfordshire SG1 2BD
 Tel: 01206 849 322
 Fax: 01438 740 338

8D Pompey Centre, Fratton Way
 Southsea, Portsmouth PO4 8TA
 Tel: 02392 894599
 Fax: 02392 894598

5 Tower Court, St David's Road
 Swansea Enterprise Park
 Swansea SA6 8RU
 Tel: 01792 797337
 Fax: 01792 774019